



# THE EXTENT OF TRAVEL TIME INCREMENT DUE TO PAVEMENT DISTRESS

Akinmade Oluwatosin Daniel, Danladi Slim Matawal, Francis Aitsebaomo and Emeso. B. Ojo  
Nigerian Building and Road Research Institute, Abuja, Nigeria  
E-Mail: [akinmadetosin@yahoo.com](mailto:akinmadetosin@yahoo.com)

## ABSTRACT

In planning and design process for all aspect of road network, traffic flow parameters estimation is crucial as such travel time which is the reciprocal of speed and is an indicator or a measure of the condition and maintenance of the road surface was established in the study using Moving Car Observer Method. A 1.2km stretch of the road which is Michael Opera Street of two lane spanning from Herbert Macaulay way to olusegun obasanjo way wuse zone 2 was used as test section. Before the rehabilitation of the road, a visual assessment of the road was carried and it was observed that cracks dominated in the pavement distress with about 62% followed by potholes and patches about 20%. The travel time was 3.06mins from A to B and from B to A it was 3.47mins having a flow of 713veh/hr and 700veh/hr with LOS B .However after rehabilitation the travel time reduced to 1.49mins and 1.56mins respectively and a flow of 1177veh/hr and 1014veh/hr was recorded respectively with LOS of C. This paper concludes that there was 51.3% and 55.04% reduction in travel time on both ways and the transportation policy of banning the mini buses from entering the wuse district made them move to this arterial to drop passengers via Berger junction and also the newly rehabilitated road attracted more traffic and we observed an increase in the motorization level after 8months of data collection, hence adverse condition, pavement distress reduces travel time.

**Keywords:** pavement distress, moving car observer, travel time, level of service.

## 1. INTRODUCTION

The influence of pavement surface conditions on travel time has been under-reported and obviously drivers may choose to drive more slowly over a surface that has deteriorated than they would driver over a more even surface. However, it has been postulated that with modern vehicles the effects are reduced and vehicle speeds are maintained but with higher operating costs.

Based on study carried out by Cooper, Jordan, and Young, in 1980, they gathered vehicle speed data for three sites in England due to be resurfaced. At two of the three sites the surface unevenness showed little change before and after resurfacing. At the third site a statistically significantly increase in the traffic mean speed levels was seen following reconstruction of the road. The observed increases in the mean speed after resurfacing were 2 km/h for private cars, 2.3 km/h for light goods vehicles, 2 km/h for medium goods vehicles, and 2.6 km/h for heavy goods vehicles.

Also in Sweden a study was carried out by (Linderoth, 1981) and (Wretling, 1996) to investigate the relationship between road surface condition and travel speed using a sample of resurfaced roads and a control group. They concluded that there was no evidence of reduced speed due to roughness.

(Wretling, 1996) described another Swedish study by (Anund, 1992) that investigated the relationship between surface quality (measured in IRI) and vehicle speed. The results showed that there was a statistically significant speed reduction of 1.6 km/h for passenger cars between 3.00 p.m. and 9.00 a.m. if the rut depth increased by 10 mm, and a reduction of 2.2 km/h for an increase of 1 IRI. The corresponding values during 9.00 a.m. and 3.00 p.m. were 1.9 km/h and 3.0 km/h. For trucks with and

without trailers, no significant speed reduction with increased roughness or rut depth was found. The results of those studies support a significant reduction in vehicle speed only when road condition deteriorates beyond some critical level that is rougher than the general level of condition of the trunk road network in Scotland.

Also in 2010 J. Ben-Edigbe carried the assessment of speed-flow-density functions under adverse pavement condition and postulated the relationship between speeds, flow under adverse road surface condition. The study was carried out in Nigeria where adverse road surface condition on principal roads is prevalent under daylight, dry weather and off-peak conditions. It is based on the hypothesis that adverse road surface condition has significant impact on otherwise uninterrupted traffic stream. The paper compared empirical survey data from 11 locations on roadway segments with control and adverse sections. Optimum speeds for control and adverse road sections were estimated and compared. The study found 50% reduction in optimum speed and concluded that significant speed reduction will occur under adverse road surface condition.

## 2. ROAD PAVEMENT DISTRESS

Road deterioration can be construed as a function of original design, material types, construction quality, road geometry, pavement age, environmental conditions, maintenance policy pursued, traffic volume and axle loading. Defects are usually manifested in the form of cracking, rutting, raveling, potholes, roughness, edge break, surface texture and polished surface. It can be argued that research into the influence of pavement distress on travel time has not been undertaken before this study, as there are no evidences of literature on previous



work. Probably the closest research works are on capacity loss, the road humps and speed cushions. They are usually in the form of measuring road service quality before and after installation of humps or speed cushions with attention concentrated on the level of service and road safety. It can be mentioned in passing that literature on the influence of severe pavement distress on travel time are scarce if at all. This may not be unconnected with the fact

that severe pavement distress is mainly found in developing countries where research works are limited for whatever reasons.

### 2.1. Case study description

The study area from the beginning to the end of Michael Opara Street adjoining at Herbert Macaulay way and Obasanjo way in wuse district of Abuja.

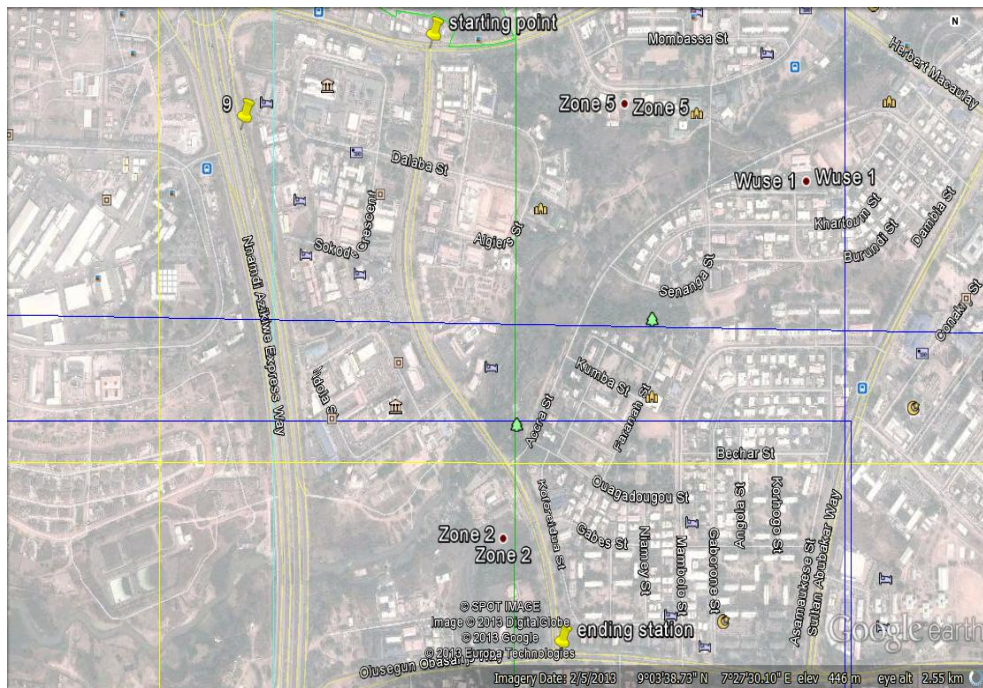


Figure-1. The study area of wuse zone 2 along Michael Opara Street.

## 3. METHODOLOGY

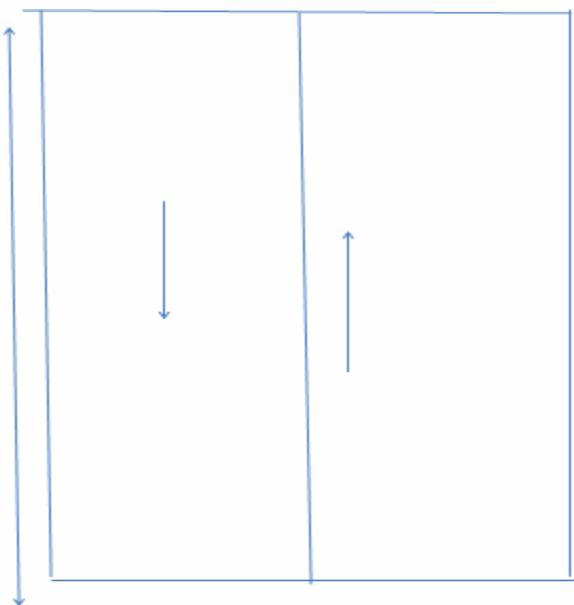


Illustration of moving observer method

Determination of any of the two parameters of the traffic flow will provide the third one by the

$$q = u \cdot k$$

equation . Moving observer method is the most commonly used method to get the relationship between the fundamental stream characteristics. In this method, the observer moves in the traffic stream unlike all other previous methods.

### 3.1. Data collection

Visual assessment of the road pavement was collected on the 17<sup>th</sup> of December to 20<sup>th</sup> December 2012 during good weather. The traffic data was collected in August 6<sup>th</sup> 2012 the time selected was off peak hour from 12 noon to 1.00 pm when the road was in bad condition and on the 25<sup>th</sup> of March 2013 another traffic data was collected when the road has been rehabilitated and open for traffic.



www.arpnjournals.com

Before rehabilitation

**Table-1.** Vehicle stream data.

| Direction A-B | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 3.30               | 70                               | 2                   | 1                       |
| 2             | 3.20               | 80                               | 0                   | 2                       |
| 3             | 2.80               | 74                               | 3                   | 1                       |
| 4             | 2.90               | 85                               | 2                   | 0                       |
| 5             | 3.245              | 78                               | 0                   | 1                       |
| 6             | 3.05               | 72                               | 1                   | 2                       |

**Table-2.** Vehicle stream data.

| Direction B-A | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 3.30               | 78                               | 3                   | 0                       |
| 2             | 3.35               | 82                               | 0                   | 2                       |
| 3             | 3.50               | 79                               | 2                   | 2                       |
| 4             | 3.40               | 74                               | 4                   | 3                       |
| 5             | 3.70               | 76                               | 3                   | 1                       |
| 6             | 3.90               | 81                               | 1                   | 1                       |

After rehabilitation of the road

**Table-2.** Vehicle stream data.

| Direction A-B | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 1.70               | 50                               | 5                   | 4                       |
| 2             | 1.53               | 48                               | 2                   | 4                       |
| 3             | 1.57               | 52                               | 4                   | 5                       |
| 4             | 1.01               | 53                               | 0                   | 1                       |
| 5             | 1.17               | 45                               | 0                   | 4                       |
| 6             | 1.40               | 49                               | 0                   | 3                       |

**Table-2.** Vehicle stream data.

| Direction B-A | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 1.33               | 52                               | 0                   | 0                       |
| 2             | 1.60               | 71                               | 0                   | 5                       |
| 3             | 1.28               | 67                               | 0                   | 2                       |
| 4             | 1.50               | 54                               | 1                   | 2                       |
| 5             | 1.40               | 49                               | 0                   | 4                       |
| 6             | 1.38               | 47                               | 0                   | 2                       |



#### 4. RESULTS AND ANALYSIS

Before rehabilitation

**Table-5.** Stream flow.

| Direction A-B | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 3.30               | 70                               | 2                   | 1                       |
| 2             | 3.20               | 80                               | 0                   | 2                       |
| 3             | 2.80               | 74                               | 3                   | 1                       |
| 4             | 2.90               | 85                               | 2                   | 0                       |
| 5             | 3.245              | 78                               | 0                   | 1                       |
| 6             | 3.05               | 72                               | 1                   | 2                       |
| Average       | 3.08               | 76.50                            | 1.33                | 1.17                    |

$$\text{Flow BA} = q_{B-A} = \frac{(N_s + nN)}{(T_s + T_n)} =$$

$$q_{B-A} = \frac{\{76.50 + (1.33 - 1.17)\}}{(3.53 + 3.08)} = 11.87 \text{ veh/min.}$$

$$\text{Average travel Time} = \bar{T}_N = T_N - \frac{(nN)}{q_{B-A}}$$

$$\text{Average travel Time} = 3.08 - \frac{(1.33 - 1.17)}{11.87} = 3.06 \text{ mins}$$

**Table-6.**

| Direction B-A | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 3.30               | 78                               | 3                   | 0                       |
| 2             | 3.35               | 82                               | 0                   | 2                       |
| 3             | 3.50               | 79                               | 2                   | 2                       |
| 4             | 3.40               | 74                               | 4                   | 3                       |
| 5             | 3.70               | 76                               | 3                   | 1                       |
| 6             | 3.90               | 81                               | 1                   | 1                       |
| Average       | 3.53               | 78.33                            | 2.17                | 1.5                     |

$$q_{B-A} = \frac{\{76.50 + (2.17 - 1.5)\}}{(3.08 + 3.53)} = 11.67 \text{ veh/min.}$$

$$\text{Average travel Time} = 3.53 - \frac{(2.17 - 1.5)}{11.67} = 3.47 \text{ mins}$$



After rehabilitation of the road.

**Table-7.**

| direction A-B | Travel time (mins) | travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 1.70               | 50                               | 5                   | 4                       |
| 2             | 1.53               | 48                               | 2                   | 4                       |
| 3             | 1.57               | 52                               | 4                   | 5                       |
| 4             | 1.01               | 53                               | 0                   | 1                       |
| 5             | 1.17               | 45                               | 0                   | 4                       |
| 6             | 1.40               | 49                               | 0                   | 3                       |
| Average       | 1.40               | 50                               | 1.83                | 3.5                     |

$$q_{A-B} = \frac{(57 + (1.83 - 3.5))}{(1.40 + 1.42)} = 19.62 \text{ veh/min.}$$

$$\text{Average travel Time} = 1.40 - \frac{(1.83 - 3.5)}{19.62} = 1.49 \text{ mins}$$

**Table-8.**

| Direction B-A | Travel time (mins) | Travelling in opposite direction | Overtaking test car | Over taking by test car |
|---------------|--------------------|----------------------------------|---------------------|-------------------------|
| 1             | 1.33               | 52                               | 0                   | 0                       |
| 2             | 1.60               | 71                               | 0                   | 5                       |
| 3             | 1.28               | 67                               | 0                   | 2                       |
| 4             | 1.50               | 54                               | 1                   | 2                       |
| 5             | 1.40               | 49                               | 0                   | 4                       |
| 6             | 1.38               | 47                               | 0                   | 2                       |
| Average       | 1.42               | 57                               | 0.17                | 2.5                     |

$$q_{B-A} = \frac{(50 + (0.17 - 2.5))}{(1.42 + 1.40)} = 16.90 \text{ veh/min.}$$

$$\text{Average travel Time} = 1.42 - \frac{(0.17 - 2.5)}{16.90} = 1.56 \text{ mins}$$



Newly rehabilitated road.



The existing road before rehabilitation.



## 5. DISCUSSIONS

The flow after rehabilitation is higher as compared to the flow before rehabilitation may be due to banning of mini buses from entering wuse district so they are forced to use this route via Berger junction and this is actually not expected since it is in contrast to the fundamental theoretical background of traffic stream that stipulates that during stable flow, low traffic flow will produce higher traffic speed and high traffic flow produce lower traffic speed which is also seen and observed in the travel time estimated before rehabilitation on both direction 3.06mins and 3.47mins respectively and after rehabilitation 1.49mins and 1.56mins on both direction. There was 51.31% and 55.04% reduction in the travel time from before rehabilitation on both directions which will also reduce operating cost for road users. How ever using the traffic volume before rehabilitation from A-B and B-A

respectively which is 713veh/hr and 700veh/hr. Both ways have traffic volume less than 85% of category B road capacity which is 816veh/hr. thus the road was operating in LOS B before the rehabilitation. And after the rehabilitation the traffic volume from A-B and B-A respectively which is 1177veh/hr and 1014veh/hr.

Also there was a sharp increase in the flow of about 30% to 40% after rehabilitation of the road. Both ways have traffic volume less than 85% of category C road capacity which is 1224veh/hr. Thus the road is now operating in LOS C after rehabilitation. in general one must have expected that the LOS should have improved from B to A at least but it was a contrast from the result may be as a result of the mini buses been given some selected route in wuse district to move, the newly rehabilitated road attracted more traffic or there is increase in motorization level in Abuja with the last eight months.

**Table-9.** Capacity for level of service evaluation.

| LOS      | A   | B   | C    | D    | E    | F     |
|----------|-----|-----|------|------|------|-------|
| CAPACITY | 600 | 960 | 1440 | 1824 | 2200 | >2200 |

## 6. CONCLUSIONS

- Adverse conditions have significant impact on level of road service however in this study the reverse was the case due to factors ranging from the current transport policy and obvious increase in the motorization level in Abuja;
- Significant reduction in travel time by more than 50% would result from adverse road surface condition;
- Significant reduction in traffic flow by up to 30% to 40% would result from adverse road surface condition. It would useful to conduct large scale studies on the extent of travel time reduction due to pavement condition for three lanes and multi-lane highway.

Salter R.J. and Hounsell N.B. 1996. Highway Traffic Analysis and Design. New York, USA.

Wardrop J.G. and Charlesworth G.A. 1954. Method os Estimating Speed and Flow of Traffic from moving Vehicle, New York, USA.

## ACKNOWLEDGEMENT

The authors appreciate the efforts of the Road Research Department for the collection of data, their support for this study and the Nigerian Building and Road Research Institute for funding this study.

## REFERENCES

J. Ben-Edigbe. 2010. Assessment of speed-flow-density functions under adverse pavement condition international journal of sustainability and development planning. 5(3): 238-252.

Arash Moradkhani Roshandeh. Macroscopic Determination of speed and flow using moving car observer method in johor bahru Malaysia. Environmental science and sustainability journal, ISBN: 978 960-474-136-6.